


Docutec-Egypt

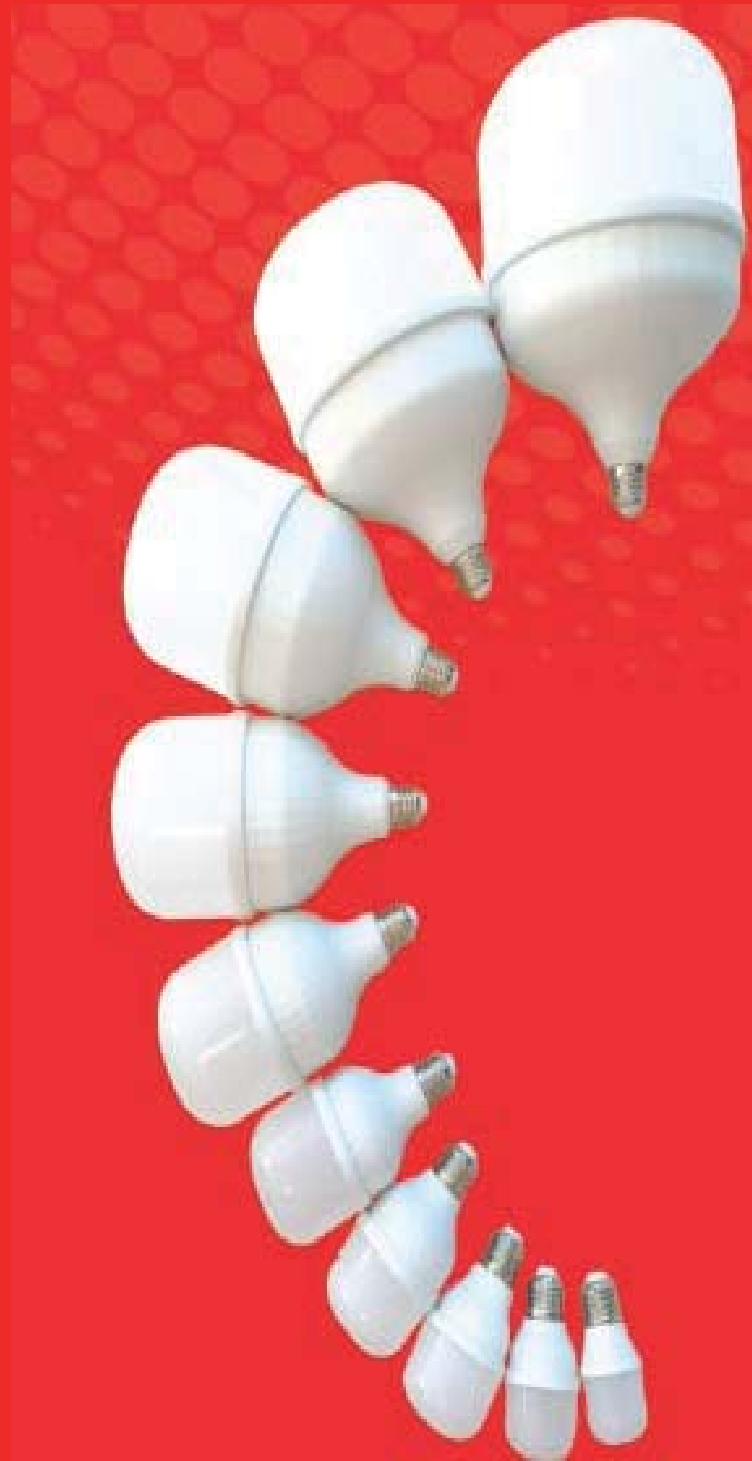

Docutec-Egypt

شركة الهندسية للصناعات الألكترونية والتكنولوجية - دكتورتك مصر

المقر الرئيسي: مدينة العبور المنطقة الصناعية الأولى  
المنطقة الشمالي شطاعة 3 بلوك 12002 ص ب 217 - كود 11828

فرع الإسكندرية: 16 شارع أدمون فربون - سموحة أمام بوابة المركز الأول على الطريق الدائري على مسافة 4 كم من المقر الرئيسي  
فرع الإسكندرية: 16 شارع أدمون فربون - سموحة أمام بوابة المركز الأول على الطريق الدائري على مسافة 4 كم من المقر الرئيسي

Main office

Egypt, Cairo, obour city first Industrial Zone North Extension, Land 3 Block 12002, P.O 2117, Zip code :11828  
Tel.+20246140400, Fax:+20244890554/+20244890089,  
[www.docutecg.com](http://www.docutecg.com), [info@docutecg.com](mailto:info@docutecg.com)



INDOOR LIGHTING

## Production Ability

Under the continuous guidance of well management and High Quality manufacturing concept Our Products are equipped with powerful production capacity with modern SMT production line , 4 manual assembly lines , 2 Aging lines , and advanced process Quality testing equipments. we can assure the strong production ability and the quality is always excellent Area of pure manufacturing area exceeds to 6500 m<sup>2</sup> , The annual Indoor of LED lighting lamps can reach 1000000 Pcs , and the Outdoor value will exceed 1000000 pcs

## Production Equipment



## Quality Control

Care lighting QC department is specially equipped with LED aging and Integrating Sphere 1.5m , Led Driver Tester , Integrating Sphere 0.5 m , Lux meter , Ac Power Supply (Over 60 HZ) and other complete testing system



## Company Profile


Docutec-Egypt is state level high-tech manufacturing & marketing enterprise, Since it has been established in 2005, Docutec - Egypt maintains higher market occupancy & brand reputation in the field of led industry. Nevertheless it insists on the core technology & development.



# LED

Cylindrical Shape LED Bulb

Item No		T40	T50	T60	T68	T80	T100	T120	T140	T160	T180
Watt		5W	7W	10W	13W/15W	18W/20W	25W/30W	35W/40W	45W/50W	60W	70W
Size		Φ42*	Φ50*	Φ60*	Φ68*	Φ80*	Φ100*	Φ120*	Φ140*	Φ160*	Φ180*
		86mm	97mm	111mm	126mm	153mm	192mm	220mm	243mm	245mm	266mm
Voltage		100-130V, 180-240V, 100-240V									
Base		E27/B22									
Material		Anti-Fire PBT with inner Alum housing, Anti-Fire PC Cover									
CRI		Ra>80 (R9>0)									
Beam Angle		230 degree									
CCT		2700K/3000K/4200K/6500K									
IP Degree		IP40									
Light Efficiency		90-100LM/W									
Lumen		450LM	630LM	900LM	1050/ 1300LM	1620/ 1800LM	2250/ 2700LM	3150/ 3600LM	4050/ 4500LM	5400LM	6300LM
LifeSpan		25000 hours									

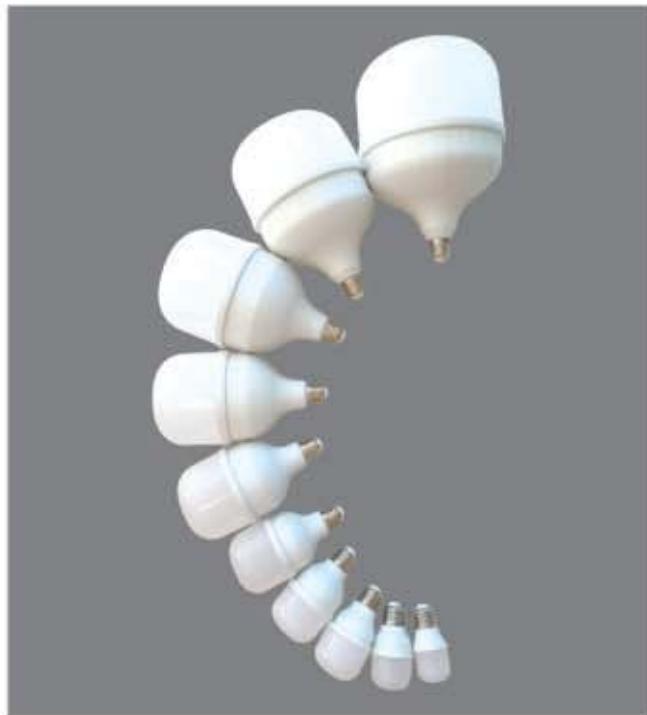


- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor



# LED

Cylindrical Shape LED Bulb -  
3 Steps Dimmable by Switch on/off

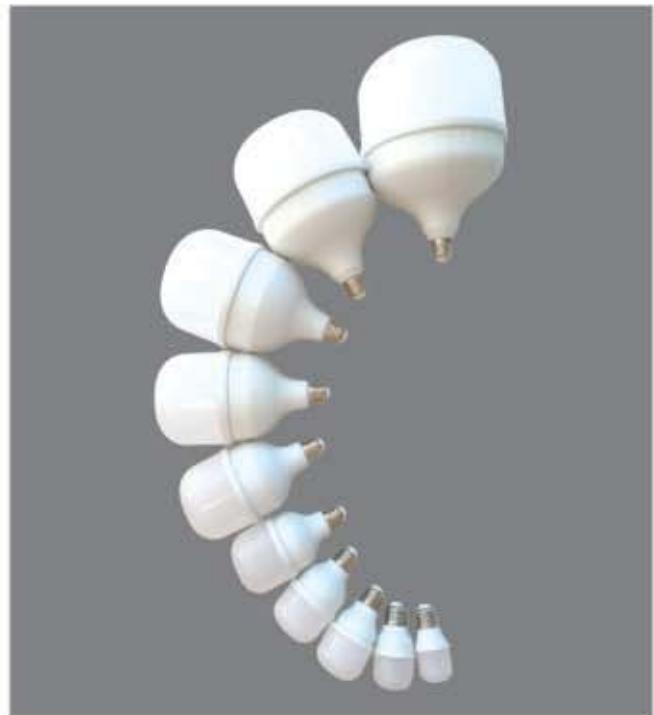

Item No	T40	T50	T60	T68	T80	T100	T120
Watt	5W	7W	10W	13W/15W	18W/20W	25W/30W	35W/40W
Size	Φ42*86mm	Φ50*97mm	Φ60*111mm	Φ68*126mm	Φ80*153mm	Φ100*192mm	Φ120*220mm
Voltage	4				100-130V, 180-240V, 100-240V		
Base	E27	B22					
Material	■						
CRI	12						
Beam Angle	230 degree						
CCT	2700K/3000K/4200K/6500K						
IP Degree	IP40						
Light Efficiency	90-100LM/W						
Lumen	450LM	630LM	900LM	1050/1300LM	1620/1800LM	2250/2700LM	3150/3600LM
Lifespan	25000 hours						



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor
- Brightness Adjustable by Switch on/off

Colortrak

# LED

Cylindrical Shape LED Bulb –  
CCT changing by Switch



Item No	T40	T50	T60	T68
Watt	5W	7W	10W	13W/15W
Size	Φ42*86mm	Φ50*97mm	Φ60*111mm	Φ68*126mm
Voltage	100-130V, 180-240V, 100-240V			
Base	E27/B22			
Material	Anti-Fire PBT with inner Alum housing, Anti-Fire PC Cover			
CRI	Ra>80 (R9>0)			
Beam Angle	230 degree			
CCT	3000K/4200K/6500K Changing by Switch on/off			
IP Degree	IP40			
Light Efficiency	90-100LM/W			
Lumen	450LM	630LM	900LM	1050/1300LM
LifeSpan	25000 hours			



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor
- Color Temperature Changing by Switch on/off



# A60

## A60 LED Bulb



Item No	A60	A60	A60	A60	A60	A70	A80	A95
Watt	5W	7W	10W	12W	13W/15W	16W/18W	18W/20W	
Size	60*108mm	60*108mm	60*118mm	60*123mm	70x138mm	80x156mm	95x162mm	
Voltage	4							
Base								
Material		Anti-Fire PBT with inner Alum housing, Anti-Fire PC Cover						
CRI		Ra>80 (R9>0)						
Beam Angle		230 degree						
CCT		2700K/3000K/4200K/6500K						
IP Degree		IP40						
Light Efficiency		90-100LM/W						
Lumen	450LM	630LM	850LM	1000LM	1100/1280LM	1350/1450LM	1450/1620LM	
LifeSpan		25000 hours						



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor



# A60

## A60 LED Bulb – 3 Steps Dimmable by Switch



Item No		A60	A60	A60	A60	A60	A70	A80	A95
Watt		5W	7W	10W	12W	13W/15W	16W/18W	18W/20W	
Size		60*108mm	60*108mm	60*118mm	60*123mm	70x138mm	80x156mm	95x162mm	
Voltage						100-130V, 180-240V, 100-240V			
Base							E27/B22		
Material									Anti-Fire PBT with inner Alum housing, Anti-Fire PC Cover
CRI									Ra>80 (R9>0)
Beam Angle									230 degree
CCT									2700K/3000K/4200K/6500K
IP Degree									IP40
Light Efficiency									90-100LM/W
Lumen		450LM	630LM	850LM	1000LM	1100/1280LM	1350/1450LM	1450/1620LM	
LifeSpan									25000 hours



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor
- 3 Steps Dimmable by Switch on/off



# A60

## A60 LED Bulb – CCT changing by Switch



Item No		A60	A60	A60	A60	A60	A70
Watt		5W	7W	10W	12W	13W/15W	
Size		60*108mm	60*108mm	60*118mm	60*123mm	60*138mm	
Voltage				100-130V, 180-240V, 100-240V			
Base				E27/B22			
Material				Anti-Fire PBT with inner Alum housing, Anti-Fire PC Cover			
CRI				Ra>80 (R9>0)			
Beam Angle				230 degree			
CCT				3000K/4200K/6500K Changing by Switch on/off			
IP Degree				IP40			
Light Efficiency				90-100LM/W			
Lumen		450LM	630LM	850LM	1000LM	1100/1280LM	
Lifespan				25000 hours			



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor
- Color Temperature Changing by Switch on/off



Colortrak

# C37

## C37 LED Bulb

Item No		C37 Ceramic	C37	C37 with Tail	C37 Clear	C37 Clear with Tail	C37 Golden	C37 Golden with Tail	C37 Silver	C37 Silver with Tail		
Watt		4W/5W 16W	4W/5W 16W	4W/5W 16W	4W/5W 16W	4W/5W 16W	4W/5W 16W	4W/5W 16W	4W/5W 16W	4W/5W 16W		
Size		37* 108mm	37*	108mm	37*	103mm	37*	103mm	37*	37*		
Voltage		100-130V, 180-240V, 100-240V										
Base		E14	E14/E27									
Material		Anti-Fire PBT with inner Alum housing, Anti-Fire PC Cover										
CRI		Ra>80 (R9>0)										
Beam Angle		300 degree										
CCT		2700K/3000K/4200K/6500K										
IP Degree		IP40										
Light Efficiency		80-90LM/W										
Lumen		320/400/470LM										
LifeSpan		25000 hours										



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor



# C37

C37 LED Bulb – 3 Steps Dimmable by Switch



Item No		C37 Ceramic	C37 with Tail	C37 Clear with Tail	C37 Golden with Tail	C37 Golden with Tail	C37 Silver with Tail
Watt		4W/5W/6W	4W/5W/6W	4W/5W/6W	4W/5W/6W	4W/5W/6W	4W/5W/6W
Size		37° 108mm	37° 108mm	37° 103mm	37° 103mm	37° 103mm	37° 102mm
Voltage				100-130V, 180-240V, 100-240V			
Base		E14	E14/E27				E14
Material		Ceramic Housing		Anti-Fire PBT with inner Alum housing, Anti-Fire PC Cover			
CRI				Ra>80 (R9>0)			
Beam Angle				300 degree			
CCT				2700K/3000K/4200K/6500K			
IP Degree				IP40			
Light Efficiency				80-90LM/W			
Lumen				320/400/470LM			
Lifespan				25000 hours			



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor
- 3 Steps Dimmable by Switch on/off



**C37**

C37 LED Bulb— CCT changing by Switch



Item No	<input checked="" type="checkbox"/> C37 Ceramic	<input type="checkbox"/> C37	<input type="checkbox"/> C37 with Tail	<input type="checkbox"/> C37 Clear	<input type="checkbox"/> C37 Clear with Tail	<input type="checkbox"/> C37 Golden	<input type="checkbox"/> C37 Golden with Tail	<input type="checkbox"/> C37 Silver	<input type="checkbox"/> C37 Silver with Tail
Watt	<input checked="" type="checkbox"/> 4W/5W /6W	<input type="checkbox"/> 4W/5W /6W	<input type="checkbox"/> 4W/5W /6W	<input type="checkbox"/> 4W/5W /6W	<input type="checkbox"/> 4W/5W /6W	<input type="checkbox"/> 4W/5W /6W	<input type="checkbox"/> 4W/5W /6W	<input type="checkbox"/> 4W/5W /6W	<input type="checkbox"/> 4W/5W /6W
Size	<input checked="" type="checkbox"/> 37* 108mm	<input type="checkbox"/> 37* 108mm	<input type="checkbox"/> 37* 108mm	<input type="checkbox"/> 37* 103mm	<input type="checkbox"/> 37* 122mm	<input type="checkbox"/> 37* 103mm	<input type="checkbox"/> 37* 122mm	<input type="checkbox"/> 37* 103mm	<input type="checkbox"/> 37* 122mm
Voltage	<input checked="" type="checkbox"/>	<input type="checkbox"/> E14	<input type="checkbox"/> E14/E27	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> E14	<input type="checkbox"/>
Base	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Material	<input checked="" type="checkbox"/> Ceramic Housing	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CRI	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Beam Angle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CCT	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
IP Degree	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Light Efficiency	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Lumen	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
LifeSpan	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor



## G45, G80, G95, G120

G45, G80, G95, G120 LED Bulb



Item No		G45 Ceramic	G45	G80	G95	G120
Watt		4W/5W/6W	4W/5W/6W	8W/10W	12W	15W
Size		45*74mm	45*74mm	80*110mm	95*129mm	120*160mm
Voltage				100-130V, 180-240V, 100-240V		
Base				E14/E27		
Material		Ceramic Housing		Anti-Fire PBT with inner Alum housing, Anti-Fire PC Cover		
CRI				Ra>80 (R9>0)		
Beam Angle				230 degree		
CCT				2700K/3000K/4200K/6500K		
IP Degree				IP40		
Light Efficiency				80-90LM/W		
Lumen		320/400/470LM	320/400/470LM	720/800LM	1000LM	1250LM
LifeSpan				25000 hours		



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor



## G45, G80, G95, G120

G45, G80, G95, G120 LED Bulb –  
CCT changing by Switch



Item No		G45 Ceramic	G45	G80	G95	G120
Watt		4W/5W/6W	4W/5W/6W	8W/10W	12W	15W
Size		45*74mm	45*74mm	80*110mm	95*129mm	120*160mm
Voltage				100-130V, 180-240V, 100-240V		
Base				E14/E27		
Material		Ceramic Housing		Anti-Fire PBT with inner Alum housing, Anti-Fire PC Cover		
CRI				Ra>80 (R9>0)		
Beam Angle				230 degree		
CCT				3000K/4200K/6500K Changing by Switch on/off		
IP Degree				IP40		
Light Efficiency				80-90LM/W		
Lumen		320/400/470LM	320/400/470LM	720/800LM	1000LM	1250LM
LifeSpan				25000 hours		



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor
- Color Temperature Changing by Switch on/off



# GU10

## GU10 BULB



Item No	GU10	GU10 with Lens					
Watt	5W 6W 7W	5W	6W	7W			
Size	50*55mm						
Voltage	100-130V, 180-240V, 100-240V						
Base	GU10/GU5.3						
Material	Anti-Fire PBT with inner Alum housing, Anti-Fire PC Cover						
CRI	Ra>80 (R9>0)						
Beam Angle	100 degree	38 degree/60 degree					
CCT	2700K/3000K/4200K/6500K						
IP Degree	IP40						
Light Efficiency	80-90LM/W						
Lumen	400LM	470LM	550LM	400LM			
Lifespan	25000 hours						



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality anti-fire PC cover, high quality anti-fire PBT lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor



Item No	T80	T100	T120	T120	T140	T160	T180
Watt	20W/25W	30W/35W	40W/45W	50W	70W	100W	120W
Size	80*145mm	100*175mm	120*205mm	120*205mm	140*228mm	160*253mm	180*280mm
Voltage	100-130V, 180-240V, 100-240V						
Base	E27/B22						
Material	Alum housing						
CRI	Ra>80 (R9>0)						
Beam Angle	230 degree						
CCT	3000K/4200K/6500K						
IP Degree	IP40						
Light Efficiency	100LM/W						
Lumen	1800/2300LM	2700/3200LM	3600/4200LM	4500LM	6300LM	8800LM	10500LM
Lifespan	35000 hours						

## Alum Housing High Power LED Bulb



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High Quality Die-Casting Alum housing
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor



Item No	2inch	2.5inch	3inch	3.5inch	4inch	6inch	8inch
Watt	3W	4.5W	6W	8W	12W	18W	30W
Product Size	D75*H35mm	D95*H40mm	D110*H40mm	D117*H48mm	D140*H48mm	D185*H48mm	D225*H63
Open Hole Size	60mm	75mm	90mm	95mm	120mm	150mm	190mm
Voltage						100-130V, 180-240V, 100-240V	
Material						Anti-Fire PC Housing with inner Alum	
CRI						Ra>80 (R9>0)	
Beam Angle						100 degree	
CCT						2700K/3000K/4200K/6500K	
IP Degree						IP40	
Light Efficiency						80-90LM/W	
Lumen	240LM	360LM	480LM	640LM	960LM	1440LM	2850LM
LifeSpan						25000 hours	

### LED Down Light



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High quality anti-fire PC lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor



Surface Mount Frame for 4inch down light  
Surface Mount Frame for 6inch down light



Item No	2inch	2.5inch	3inch	3.5inch	4inch	6inch	8inch
Watt	3W	4.5W	6W	8W	12W	18W	30W
Product Size	D75*H35mm	D95*H40mm	D110*H40mm	D117*H40mm	D140*H48mm	D185*H48mm	D225*H63
Open Hole Size	60mm	75mm	90mm	95mm	120mm	150mm	190mm
Voltage	~				100-130V, 180-240V, 100-240V		
Material	PC				Anti-Fire PC Housing with inner Alum		
CRI	RA				RA>80 (R9>0)		
Beam Angle	100	degree					
CCT	~				2700K/3000K/4200K/6500K		
IP Degree	IP40						
Light Efficiency	80-90LM/W						
Lumen	240LM	360LM	480LM	640LM	960LM	1440LM	2850LM
LifeSpan	~				25000 hours		

LED Down Light  
3 Steps Dimmable by Switch on/off



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High quality anti-fire PC lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor
- 3 Steps Dimmable by Switch on/off



Surface Mount Frame for 4inch down light  
Surface Mount Frame for 6inch down light



Colortrak

### LED Down Light CCT changing by Switch



Item No		2inch	2.5inch	3inch	3.5inch	4inch	6inch	8inch
Watt		3W	4.5W	6W	8W	12W	18W	30W
Product Size		D75*H35mm	D95*H40mm	D110*H40mm	D117*H40mm	D140*H48mm	D185*H48mm	D225*H63
Open Hole Size		60mm	75mm	90mm	95mm	120mm	150mm	190mm
Voltage		100-130V, 180-240V, 100-240V						
Material		Anti-Fire PC Housing with inner Alum						
CRI		Ra>80 (R9>0)						
Beam Angle		100 degree						
CCT		3000K/4200K/6500K Changing by Switch on/off						
IP Degree		IP40						
Light Efficiency		80-90LM/W						
Lumen		240LM	360LM	480LM	640LM	960LM	1440LM	2850LM
LifeSpan		25000 hours						



Surface Mount Frame for 4inch down light  
Surface Mount Frame for 6inch down light




- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High quality anti-fire PC lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor
- Color Temp Changing by Switch on/off




Item No		2inch	2.5inch	2.5inch	3.5inch	3.5inch	4inch
Shape		Round/Square	Round/Square	Round/Square	Round/Square	Round/Square	Round/Square
Watt		3W	4.5W	6W	7W/8W	7W/8W	12W
Product Size		D75*H43mm	D95*H45mm	D95*H45mm	D117*H52mm	D140*H56mm	
Open Hole Size		55mm	75mm	75mm	90mm	120mm	
Voltage		100-130V, 180-240V, 100-240V					
Material		Anti-Fire PBT Housing with inner Alum, PC Front Frame					
CRI		Ra>80 (R9>0)					
Beam Angle		38 degree	38 degree	38 degree	30 degree	30 degree	30 degree
CCT		2700K/3000K/4200K/6500K					
IP Degree		IP40					
Light Efficiency		80-90LM/W					
Lumen		240LM	360LM	480LM	560/640LM	960LM	
Lifespan		25000 hours					

### LED Spot Down Light

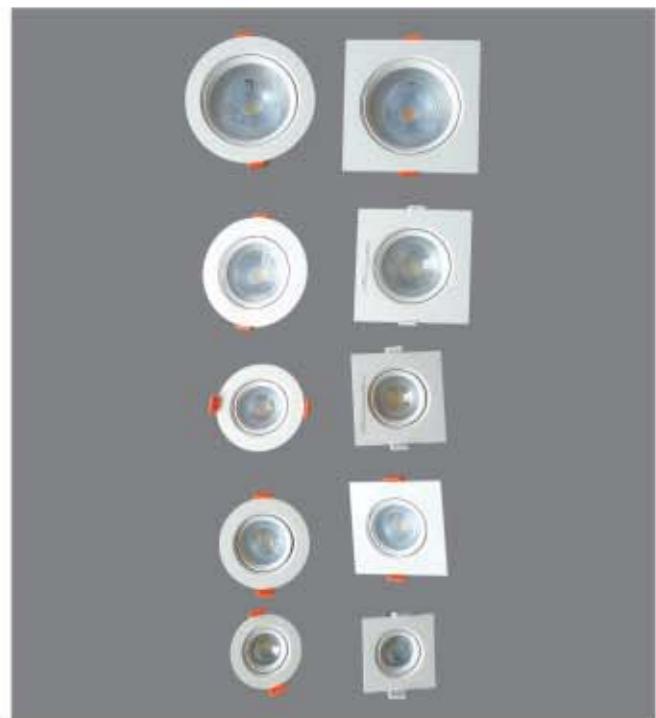


- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High quality anti-fire PC lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor

### LED Spot Down Light – 3 Steps Dimmable by Switch

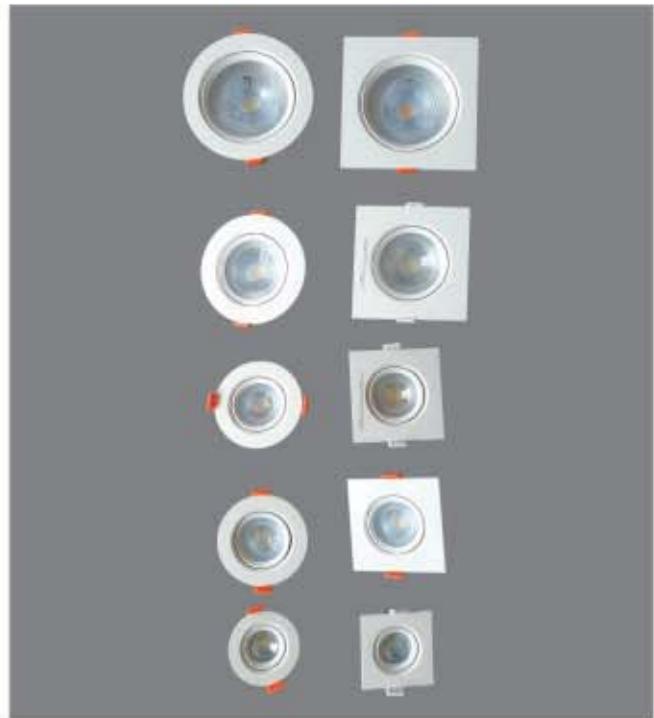

Item No		2inch	2.5inch	2.5inch	3.5inch	4inch
Shape		Round/Square	Round/Square	Round/Square	Round/Square	Round/Square
Watt		3W	4.5W	6W	7W/8W	12W
Product Size		D75*H43mm	D95*H45mm	D95*H45mm	D117*H52mm	D140*H56mm
Open Hole Size		55mm	75mm	75mm	90mm	120mm
Voltage		100-130V, 180-240V, 100-240V				
Material		Anti-Fire PBT Housing with inner Alum, PC Front Frame				
CRI		Ra>80 (R9>0)				
Beam Angle		38 degree	38 degree	38 degree	30 degree	30 degree
CCT		2700K/3000K/4200K/6500K				
IP Degree		IP40				
Light Efficiency		80-90LM/W				
Lumen		240LM	360LM	480LM	560/640LM	960LM
Lifespan		25000 hours				

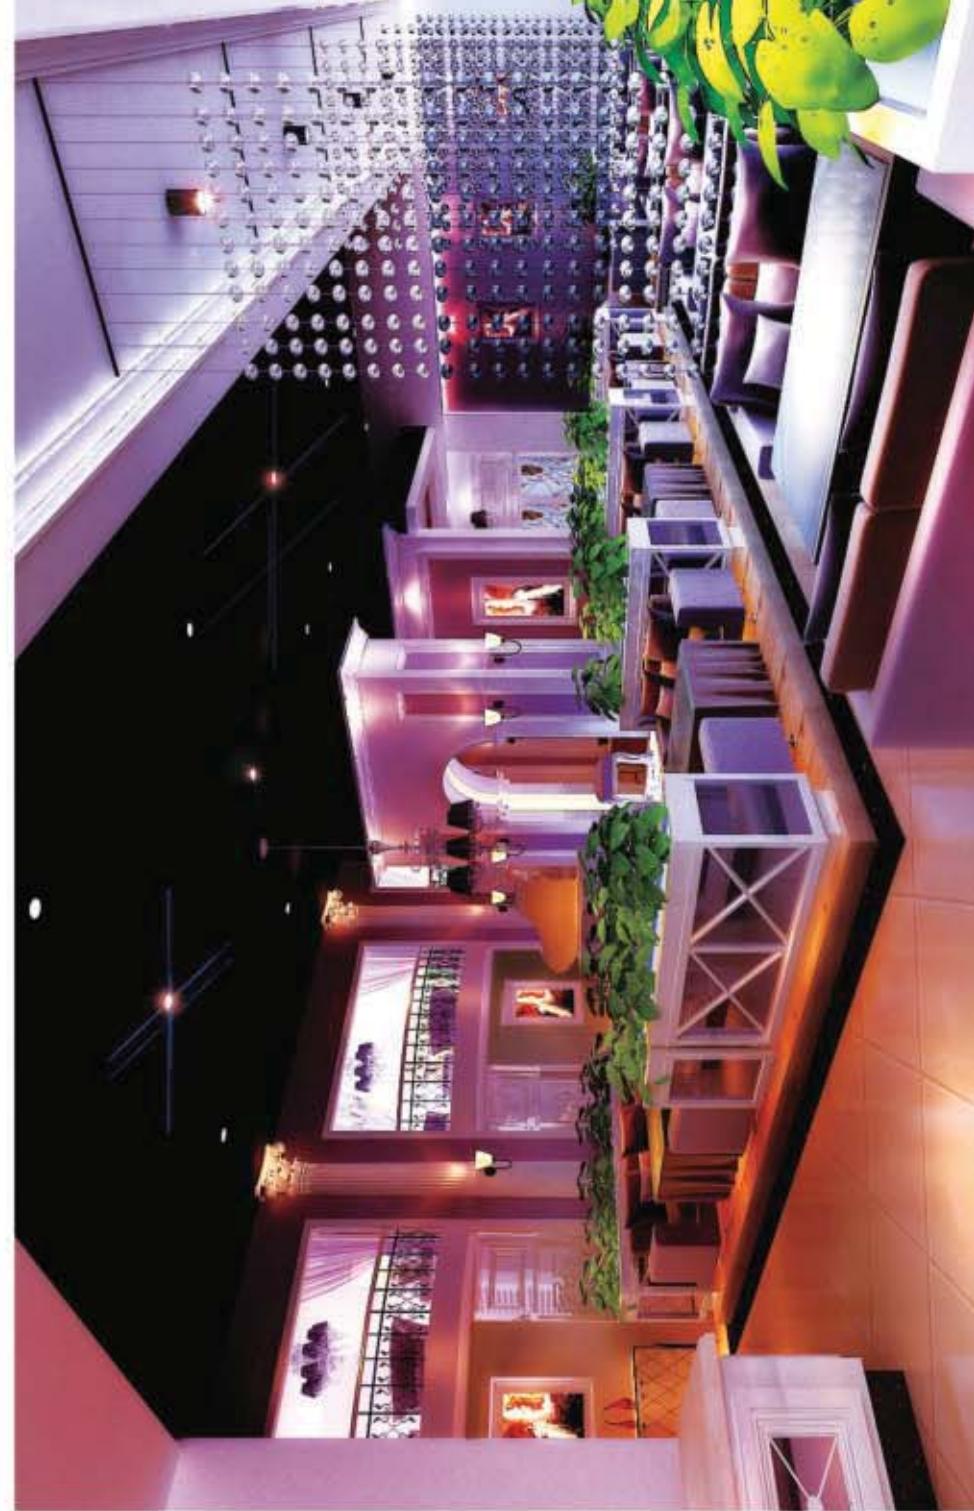

- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High quality anti-fire PC lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor
- 3 Steps Dimmable by Switch



Item No		2.5inch	3.5inch	4inch
Shape		Round/Square	Round/Square	Round/Square
Watt		7W	10W/12W	15W
Product Size		D95H59mm	D120H74mm	D140H89mm
Open Hole Size		75mm	95mm	120mm
Voltage		100-130V, 180-240V, 100-240V		
Material		Anti-Fire PBT Housing with inner Alum, PC Front Frame		
CRI		Ra>80 (R9>0)		
Beam Angle		38 degree	38 degree	38 degree
CCT		2700K/3000K/4200K/6500K		
IP Degree		IP40		
Light Efficiency		80-90LM/W		
Lumen		560LM	800LM/1000LM	1200LM
Lifespan		25000 hours		

### Recessed Shape LED Spot Down Light



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High quality anti-fire PC lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor

**Recessed Shape LED Spot Down Light –  
3 Steps Dimmable by Switch on/off**



Item No	Q	2.5inch	3.5inch	4inch
Shape	□	Round/Square	Round/Square	Round/Square
Watt	W	7W	10W/12W	15W
Product Size	∅	D95H59mm	D120H74mm	D140H89mm
Open Hole Size	∅	75mm	95mm	120mm
Voltage	⚡	100-130V, 180-240V, 100-240V		
Material	▣	Anti-Fire PBT Housing with inner Alum, PC Front Frame		
CRI	✗	Ra>80 (R9>0)		
Beam Angle	▢	38 degree	38 degree	38 degree
CCT	🌡	2700K/3000K/4200K/6500K		
IP Degree	ⓘ	IP40		
Light Efficiency	☀	80-90LM/W		
Lumen	💡	560LM	800LM/1000LM	1200LM
Lifespan	⌚		25000 hours	




- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High quality anti-fire PC lamp body
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor
- 3 Steps Dimmable by Switch on/off




Item No	DP225 DP175	DP300	DP600	DP600	DP600
Watt	18w	28w	36w	40w	48w
Size	225*225mm 175*175mm	300*600mm	600*600mm	600*600mm	600*600mm
Voltage		100-130V , 180-240V, 100-240V			
Material		PC , PS, MS, PMMA			
CRI		Ra>80			
Beam Angle		110 degree			
CCT		2700K/3000K/4200K/6500K			
IP Degree		IP40 , IP65			
Light Efficiency		90-100 LM/W			
Lumen	1800LM	2800LM	3600LM	4000LM	4800LM
Life Span		30000 hours			

## LED Panel Light Series

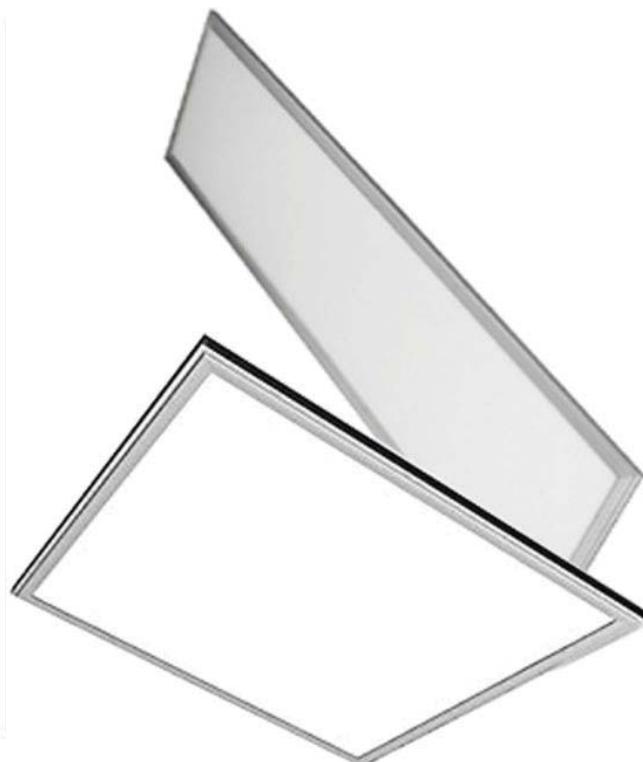

- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice and Unique Design
- High quality anti-fire PC lamp body
- High Quality LED chips, LM80 LED inside ( $R9 > 0$ )
- IC constant current driver, High Quality IC and capacitor

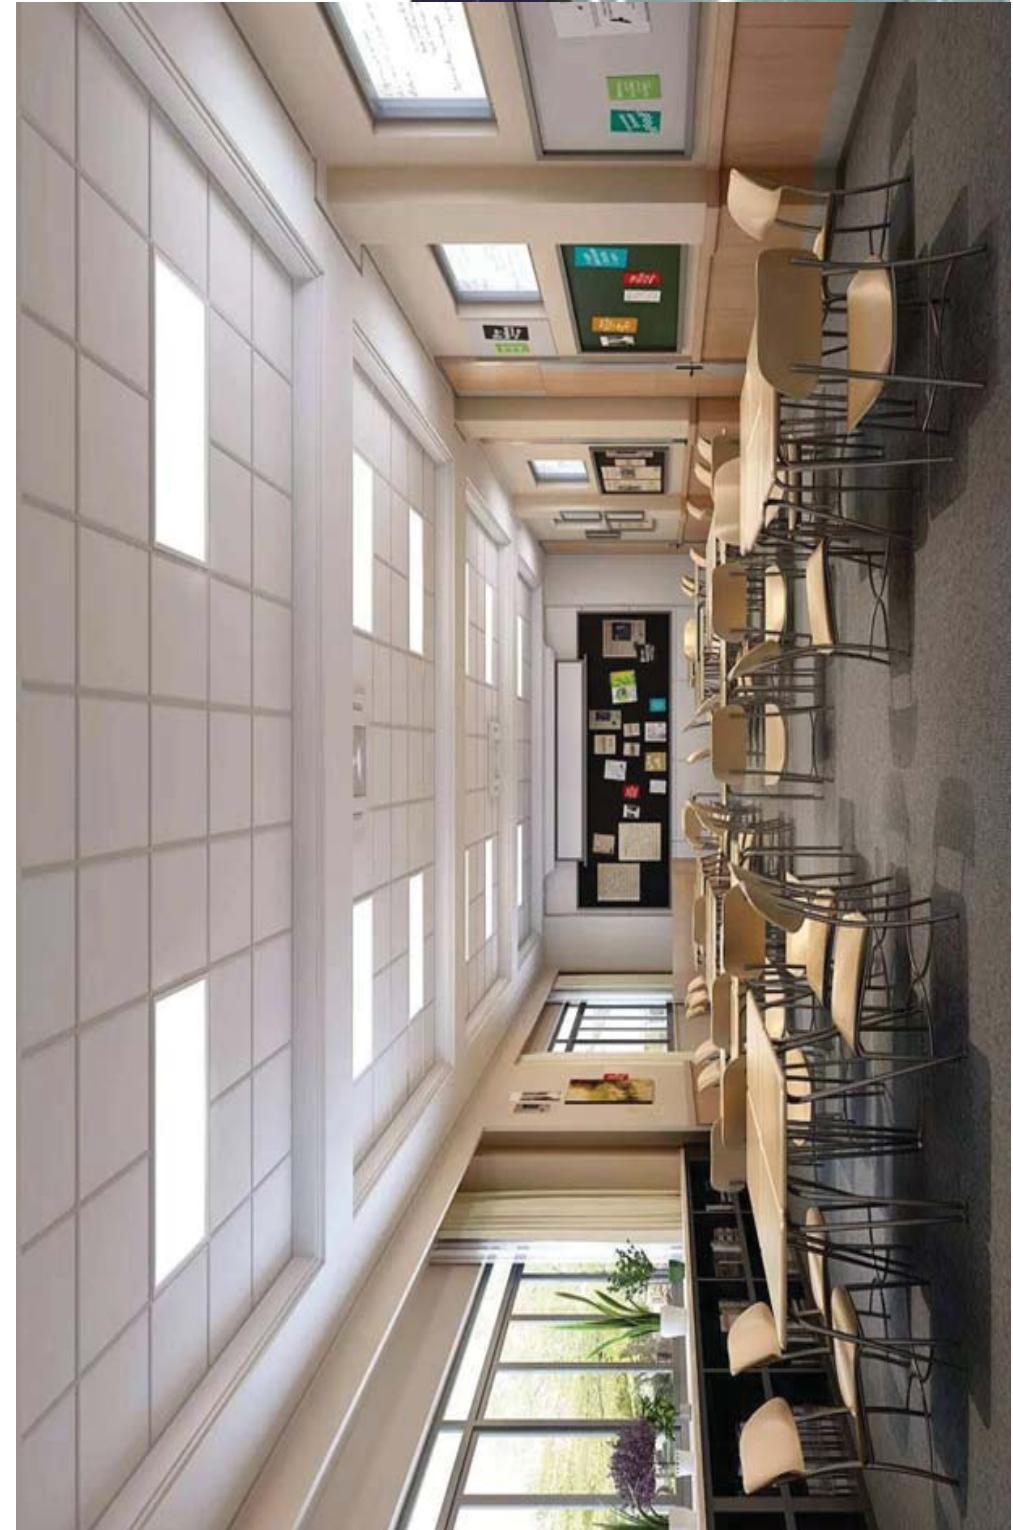

Item No	DT300	DT600	DT900	DT1200	DT1500
Watt	4.5W	9W	15W	18W	24W
Size	300mm	600mm	900mm	1200mm	1500mm
Voltage	100-130V , 180-240V, 100-240V				
Base	G13				
Material	PC + Alu . Nano PC . Glass				
CRI	Ra>80				
Beam Angle	120 degree				
CCT	2700K/3000K/4200K/6500K				
IP Degree	IP20				
Light Efficiency	90-100 LM/W				
Lumen	450LM	900LM	1500LM	1800LM	2400LM
Life Span	25000 hours				

## LED Tube Light



- Product pass CE, GS, ROHS, CCC, KC, INMETRO certification
- Nice Compact Design, Unique in Market
- Compact Shape, save your transport cost
- High Quality LED chips, LM80 LED inside (R9>0)
- IC constant current driver, High Quality IC and capacitor

Colortrak